

LARGE Series ,Cable

Description



Female Screw Type

Male Lock Type

Figure



Drawing

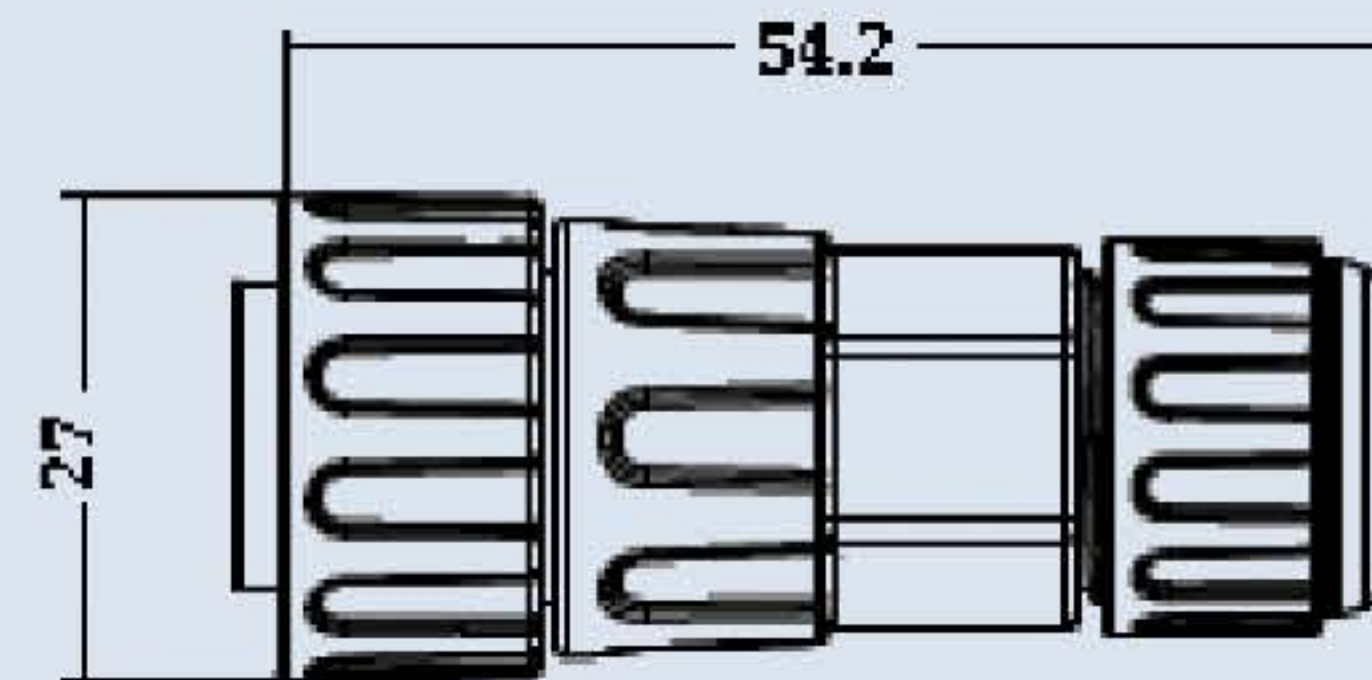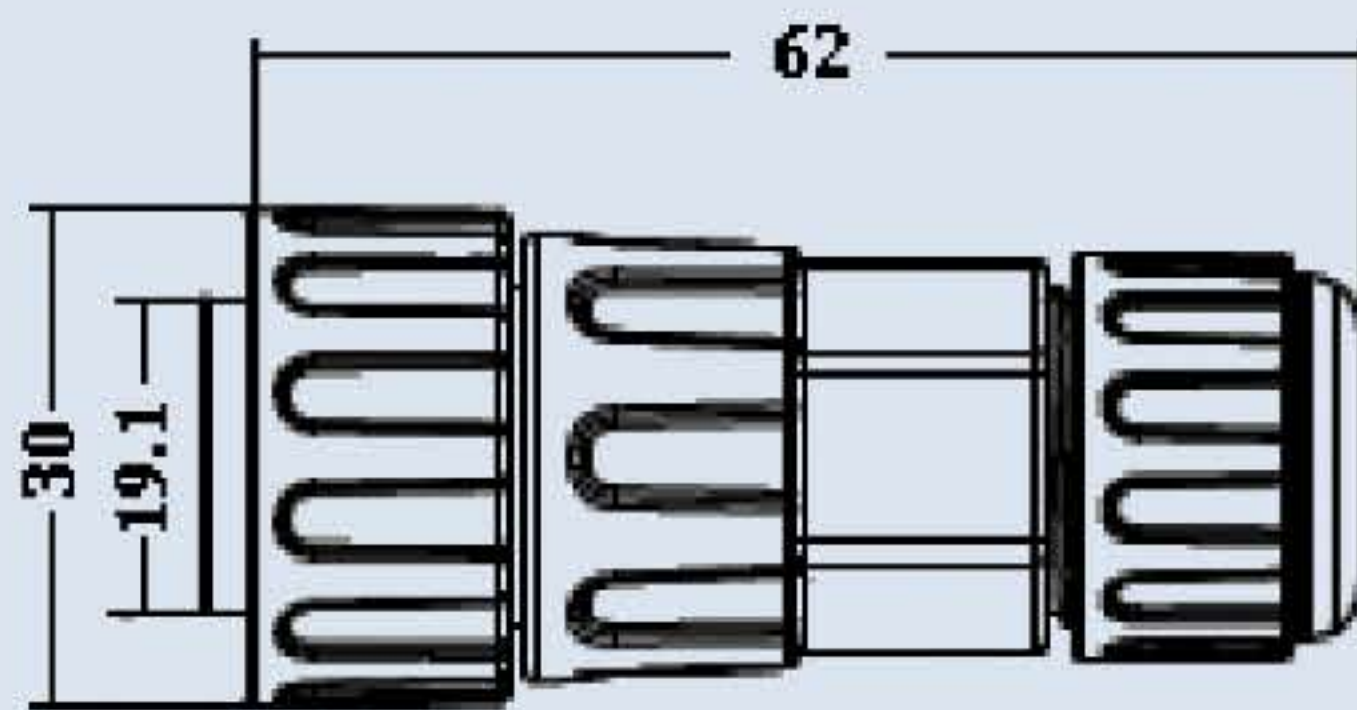

Part-No.

Contacts	Cable Range(mm)	Part-Number
2	7.0 - 12	M25C02
3	7.0 - 12	M25C03
4	7.0 - 12	M25C04
5	7.0 - 12	M25C05
6	7.0 - 12	M25C06
3+9	7.0 - 12	M25C3+9
24	7.0 - 12	M25C24

Contacts	Cable Range(mm)	Part-Number
2	7.0 - 12	HYF-300A02-M-02
3	7.0 - 12	HYF-300A02-M-03
4	7.0 - 12	HYF-300A02-M-04
5	7.0 - 12	HYF-300A02-M-05
6	7.0 - 12	HYF-300A02-M-06
3+9	7.0 - 12	HYF-300A02-M-3+9
24	7.0 - 12	HYF-300A02-M-24

Specifications

Number of Contacts	2	3	4	5	6	3+9	24
Wire Gauge	4.0mm ²		2.5mm ²			1.5mm ² +0.2mm ²	0.3mm ²
Cable Range	7.0-12mm						
Environmental Protection	IP67						
Mechanical Life	500 mating cycles						
Operating Temperature	- 45°C - 105°C						
DC Voltage Rating	500V					300V	
Rated Current(40°C)	35A		20A			20A+3A	5A