

MIDDLE Series, Lock Cable

Description



Female Lock Type

Male Lock Type

Figure



Drawing

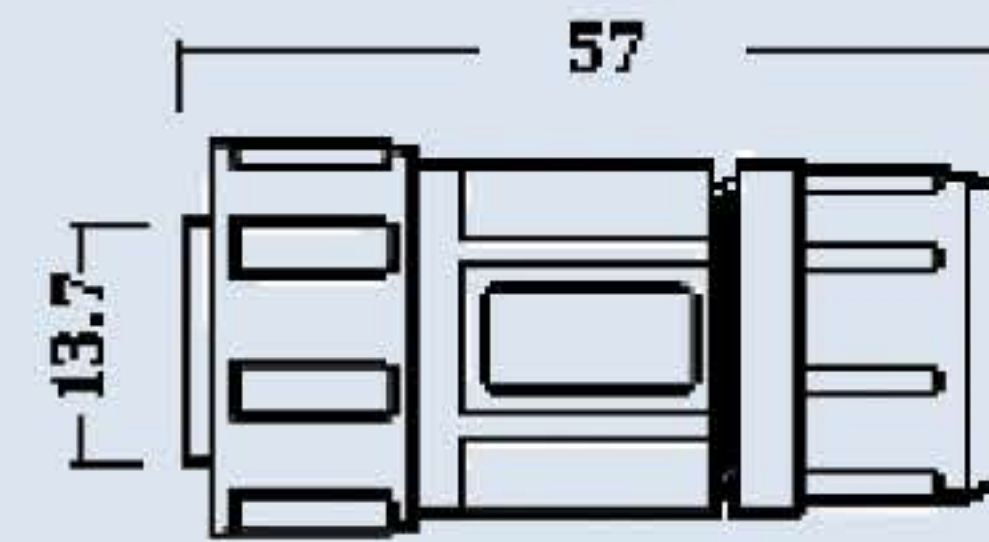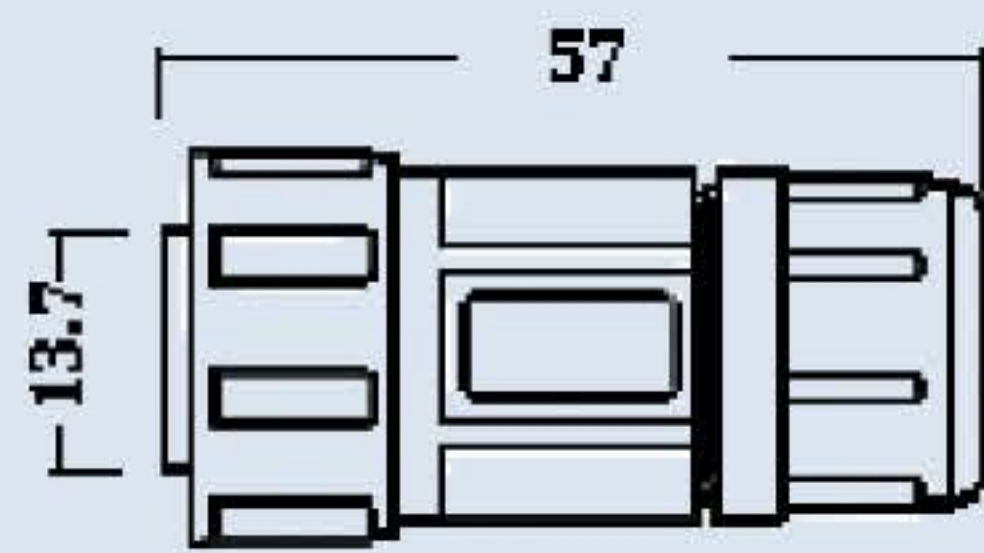

Part-No.

Contacts	Cable Range(mm)	Part-Number
2	6.5-10	HYF-280A02-F-02
3	6.5-10	HYF-280A02-F-03
4	6.5-10	HYF-280A02-F-04
5	6.5-10	HYF-280A02-F-05
6	6.5-10	HYF-280A02-F-06
8	6.5-10	HYF-280A02-F-08
9	6.5-10	HYF-280A02-F-09
12	6.5-10	HYF-280A02-F-12
14	6.5-10	HYF-280A02-F-14

Contacts	Cable Range(mm)	Part-Number
2	6.5-10	M19BFC02
3	6.5-10	M19BFC03
4	6.5-10	M19BFC04
5	6.5-10	M19BFC05
6	6.5-10	M19BFC06
8	6.5-10	M19BFC08
9	6.5-10	M19BFC09
12	6.5-10	M19BFC12
14	6.5-10	M19BFC14

Specifications

Number of Contacts	2	3	4	5	6	8	9	12	14
Wire Gauge	2.5mm ² (14AWG)		1.0mm ² (17AWG)	0.75mm ² (18AWG)		0.34mm ² (22AWG)		0.34mm ² (24AWG)	
Cable Range	6.5~10mm								
Environmental Protection	IP67								
Mechanical Life	500 mating cycles								
Operating Temperature	- 45°C - 105°C								
DC Voltage Rating	500V					400V	300V		
Rated Current(40°C)	20A			5A					