

MIDDLE Series , Lock Cable To Cable

Description


Male Lock Type

Female Lock Type

Figure



Drawing

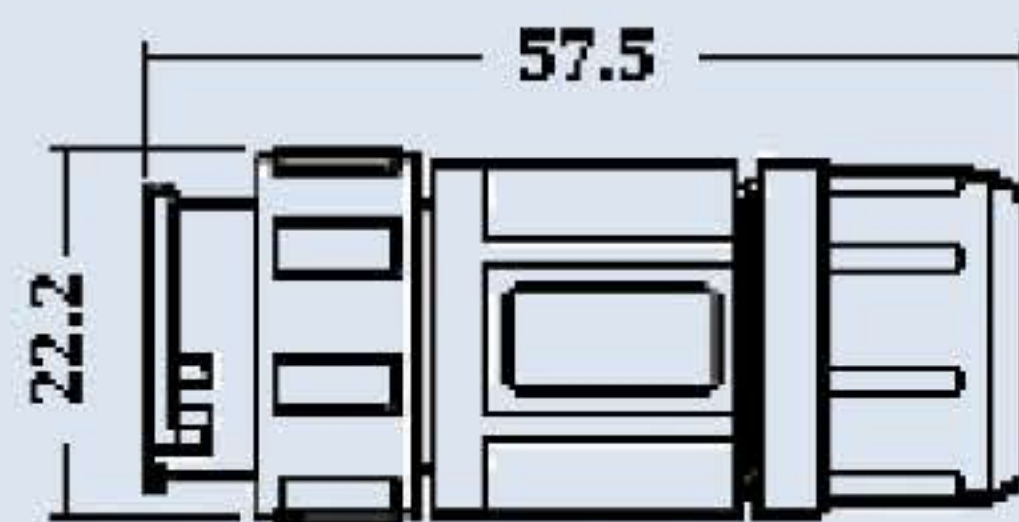

Part-No.

Contacts	Cable Range(mm)	Part-Number
2	6.5-10	HYF-280A01-M-02
3	6.5-10	HYF-280A01-M-03
4	6.5-10	HYF-280A01-M-04
5	6.5-10	HYF-280A01-M-05
6	6.5-10	HYF-280A01-M-06
8	6.5-10	HYF-280A01-M-08
9	6.5-10	HYF-280A01-M-09
12	6.5-10	HYF-280A01-M-12
14	6.5-10	HYF-280A01-M-14

Contacts	Cable Range(mm)	Part-Number
2	6.5-10	M19BFC02-1
3	6.5-10	M19BFC03-1
4	6.5-10	M19BFC04-1
5	6.5-10	M19BFC05-1
7	6.5-10	M19BFC06-1
8	6.5-10	M19BFC08-1
9	6.5-10	M19BFC09-1
12	6.5-10	M19BFC12-1
14	6.5-10	M19BFC14-1

Specifications

Number of Contacts	2	3	4	5	6	8	9	12	14
Wire Gauge	2.5mm ² (14AWG)		1.0mm ² (17AWG)	0.75mm ² (18AWG)		0.34mm ² (22AWG)		0.34mm ² (24AWG)	
Cable Range	6.5-10mm								
Environmental Protection	IP67								
Mechanical Life	500 mating cycles								
Operating Temperature	- 45°C - 105°C								
DC Voltage Rating	500V					400V	300V		
Rated Current(40°C)	20A				5A				